


Operating Mode Instructions

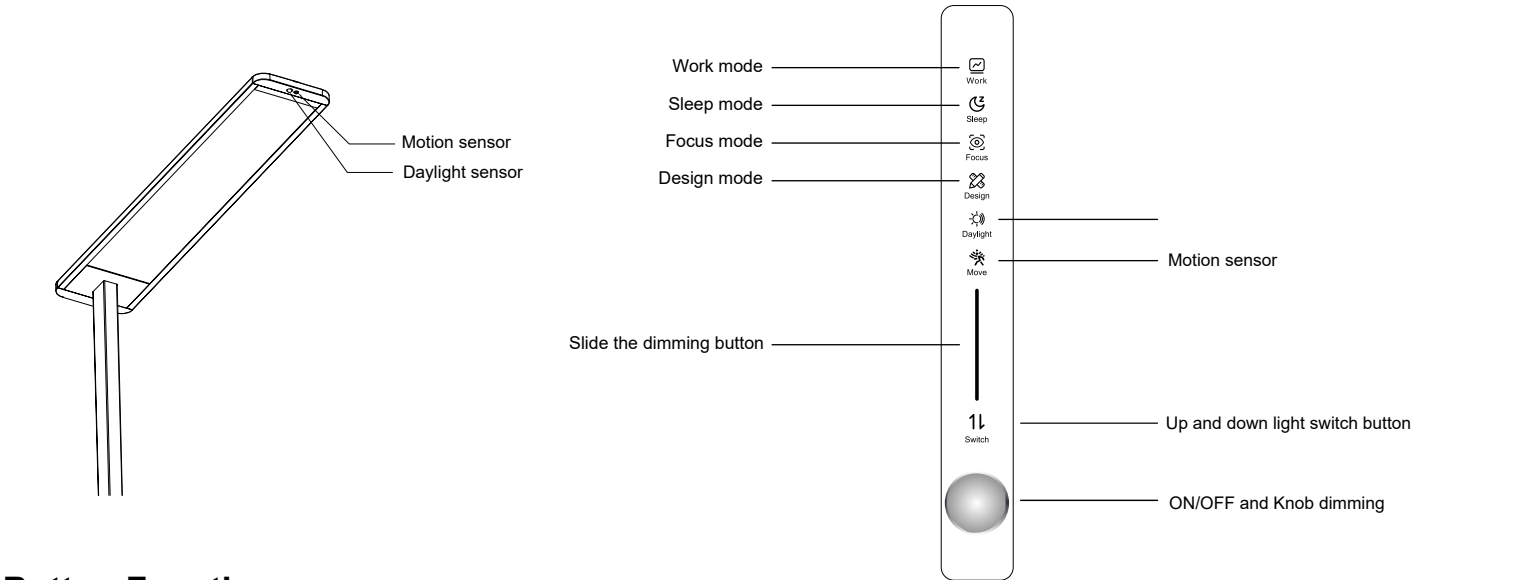

Button Functions

①	②	③	④	⑤
Press the "ON/OFF" to turn the light on or off, and rotate it clockwise or counterclockwise to adjust the dimming.	A short press of the "Up/Down" switches the lights up and down.	Slide the "Dimming" up or down to adjust the brightness	Short press "Work", "Focus", or "Design" to enter work mode, focus mode, or design mode.	Short press "Sleep" to enter sleep mode, the light will automatically turn off after 15 minutes if no one is around.

Motion Sensor Mode

①	②	③	④	⑤
Tap "Move" to turn on or off	When this mode is activated, the lights turn on and adjust the brightness to the level before the mode was turned off when the sensor detects a person.	The lights will remain on for 8 minutes after someone leaves.	If no one is around for 8 minutes, the lights will adjust their brightness to 10%.	The lights will automatically turn off after another 8 minutes.

Daylight Sensor Mode

①	②	③	④	⑤
Tap "Daylight" to turn on or off	After the mode is activated, manually adjust to a suitable illuminance. After 3 seconds, when the ambient brightness increases or decreases, the light fixture will dim or brighten, automatically maintaining the previously set illuminance value.	When the ambient brightness exceeds the set value, the light fixture will reduce its brightness and automatically adjust to the previously set illuminance value.	When the ambient light level decreases, the lights will brighten and automatically adjust to the previously set illuminance value.	When the ambient light is at its lowest, and the light still cannot reach the set illuminance, the light's brightness reaches its maximum.