



Mode Function Description

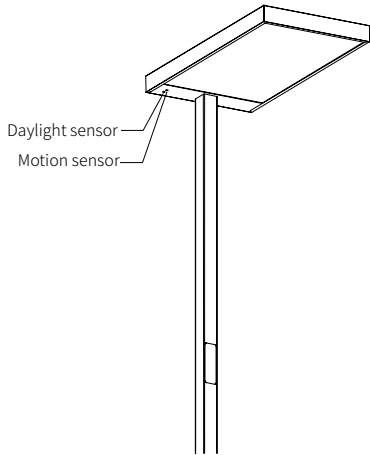

Up illuminated button indicator light	•	Up light on/off, dimming button
On/off indicator light	•	On/off (whole lamp)
Down illuminated button indicator light	•	Down light on/off, dimming button
Motion sensor switch indicator light	•	Motion sensor dimming button
Daylight sensor switch indicator light	•	Daylight sensor dimming button

Touch dimming

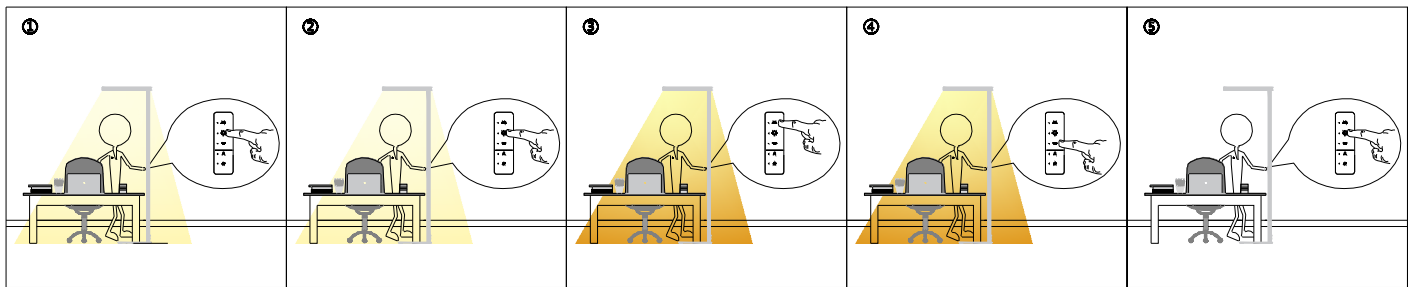

① short press for “” on/off


② Long press for “” dimming

③ Short press for “” up lighting on/off Long press to start dimming, Stop dimming when the appropriate brightness is reached

④ Short press for “” down lighting on/off; Long press to start dimming, Stop dimming when the appropriate brightness is reached

⑤ Short press again “” turn off

Motion sensor

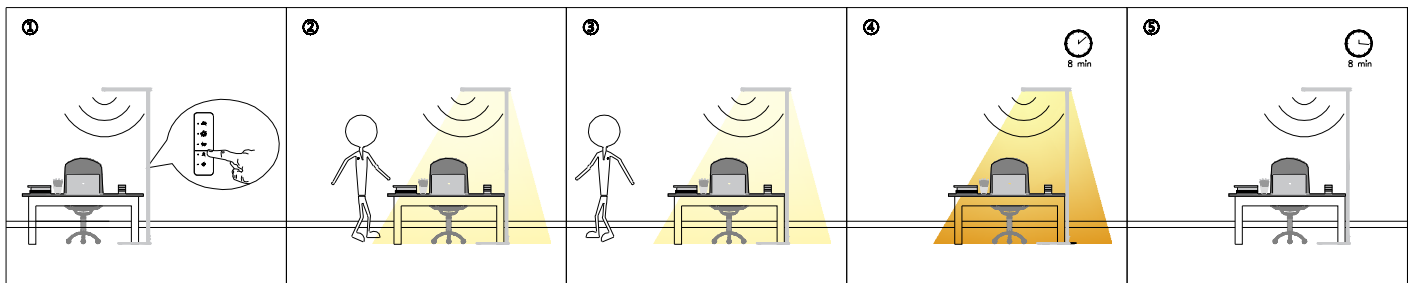

① Touch “” to turn on or off the motion sensor


② When the mode is on, when the sensor detects a person, the lamp turns on and adjusts the brightness to the brightness before it is turned off.

③ When people leave, the lamp can continue to stay on for 8 minutes

④ If no one is around for 8 minutes, the lamp will adjust the brightness to 10%

⑤ After next 8 minutes, the lamp will automatically turn off

Daylight sensor

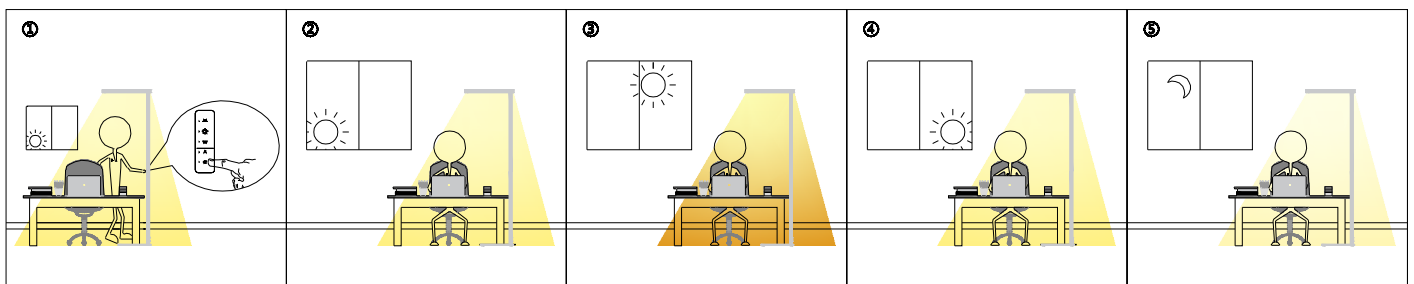

① Touch “” to turn on or off the daylight sensor

② After the mode is turned on, manually adjust to the appropriate illumination. After 3 seconds, when the ambient brightness increases or decreases, the lamp will dim or brighten automatically. Automatically maintain the previously set illumination value

③ When the ambient brightness exceeds the set value, the lamp will reduce the brightness and automatically adjust to the previously set illumination value.

④ When the ambient brightness becomes low, the lamp will be brightened and automatically adjusted to the previously set illumination value.

⑤ When the ambient brightness is low and the lamp still cannot reach the set illumination, the brightness of the lamp reaches the maximum