
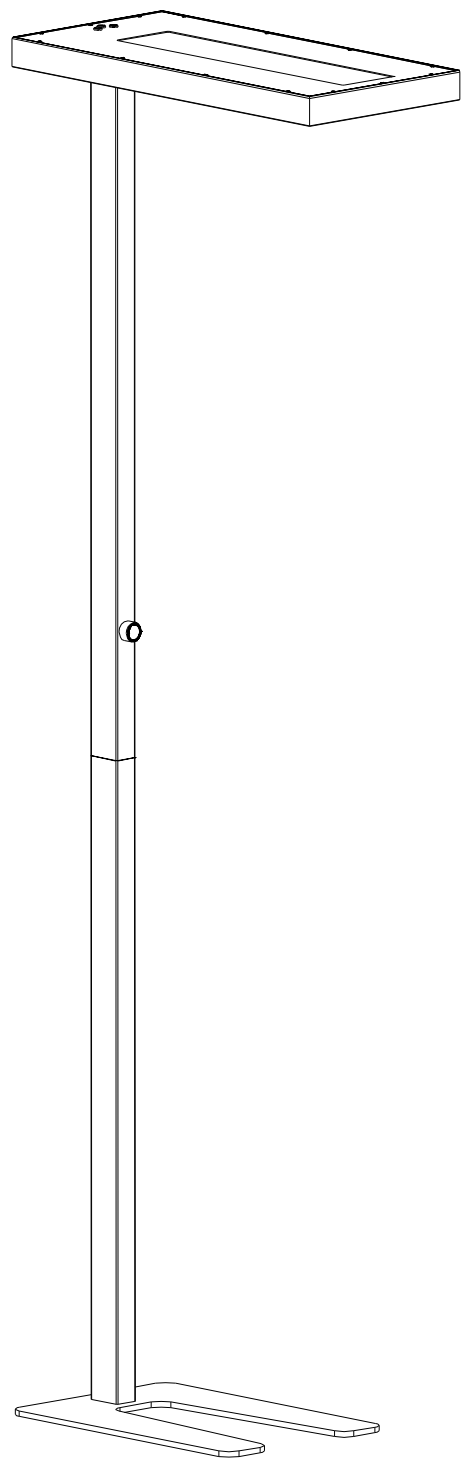



Installation Instruction

1




Rubber stopper		BX3
Screw A		BX6
Screw B		X2
Screwdriver		X1

2

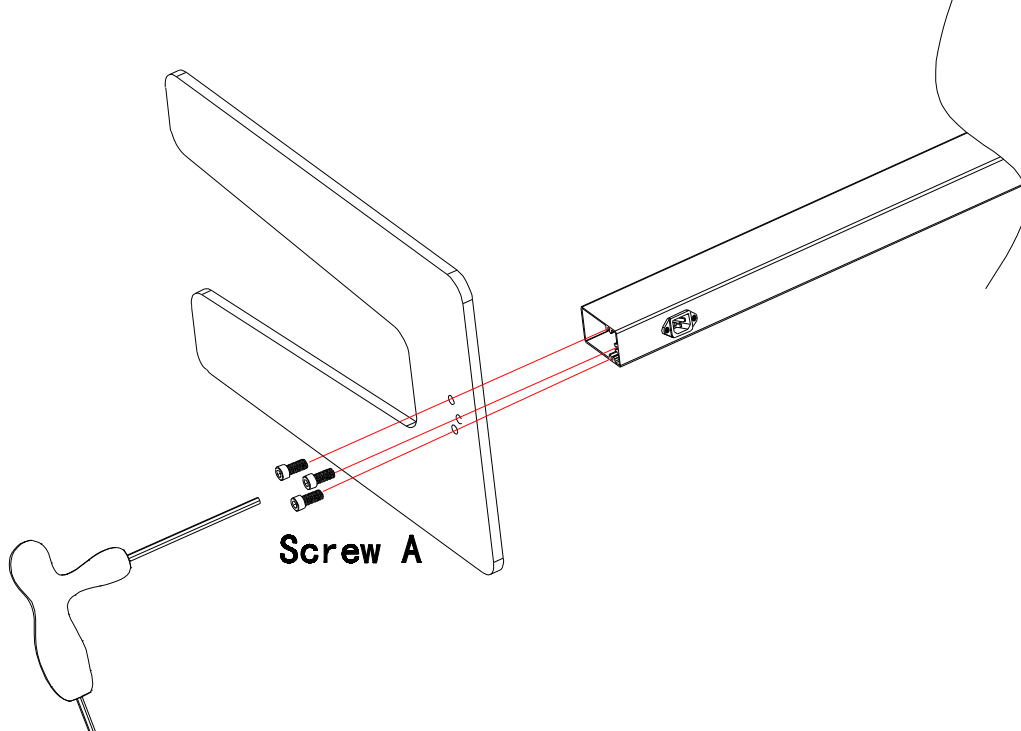


1. Open the product packaging and remove all parts. Lay the foam padding inside the packaging on the ground for installation.
2. Remove the base and take necessary precautions to prevent it from tipping over and causing personal injury.
3. Remove screw A from the accessory kit. The base has three pre-drilled holes for securing the lamp pole, as shown in the picture. Use screw A to connect to the end of the socket at the bottom of the lamp pole.
4. Tighten the screw using a hex wrench.

3

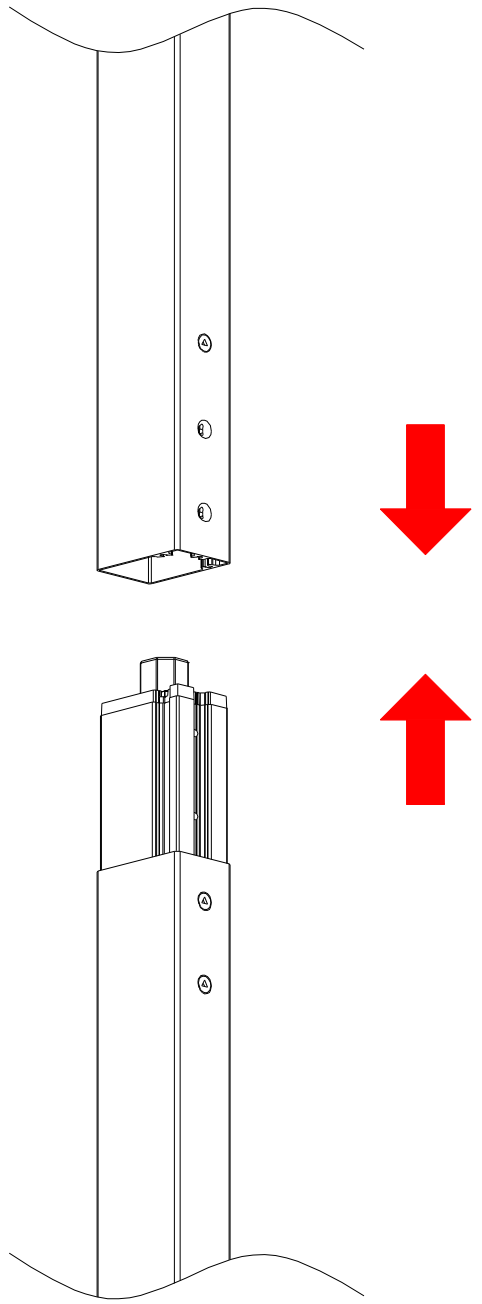


Connect the upper and lower light poles as shown in the picture.

4

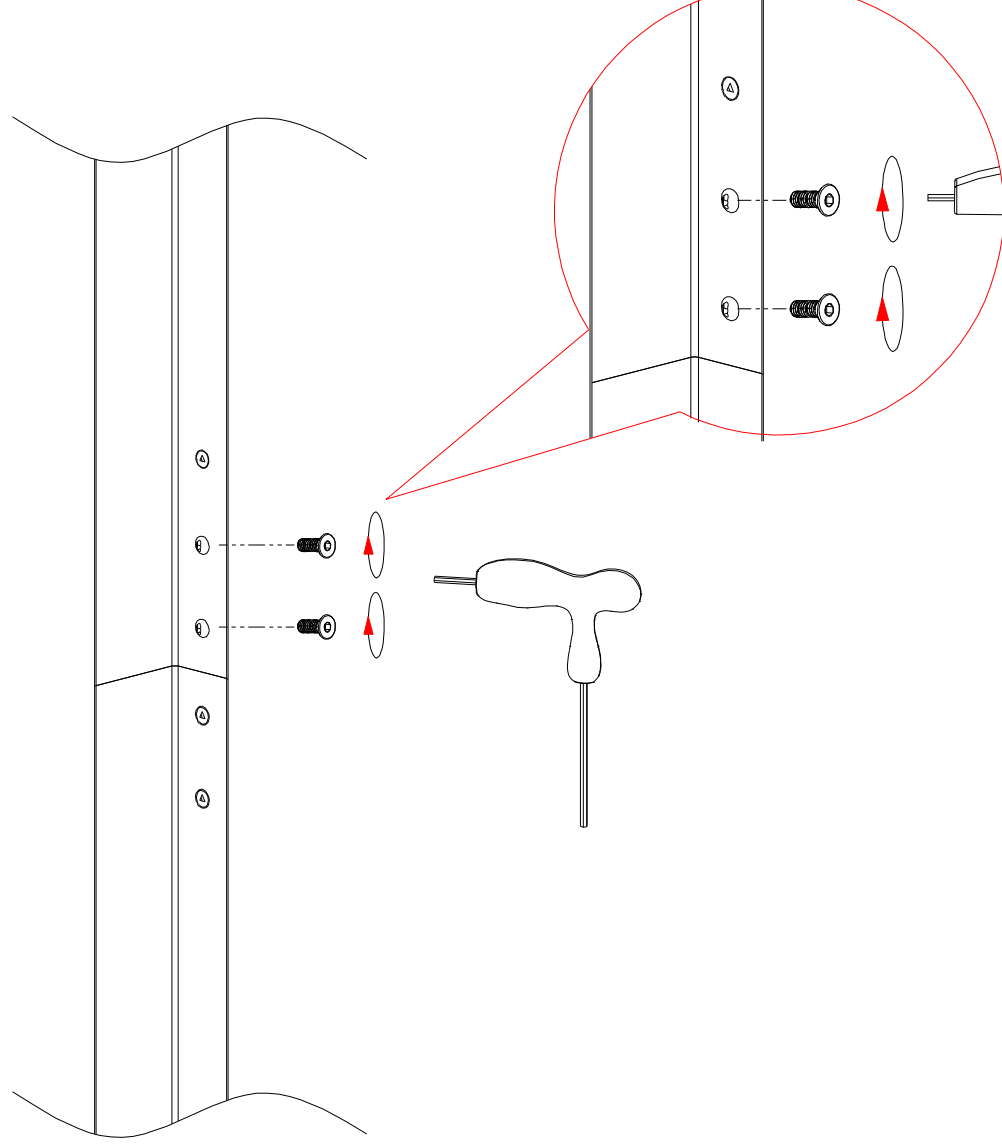


After successful connection, use a hex wrench to screw screw B into the screw hole to secure the light pole.

5

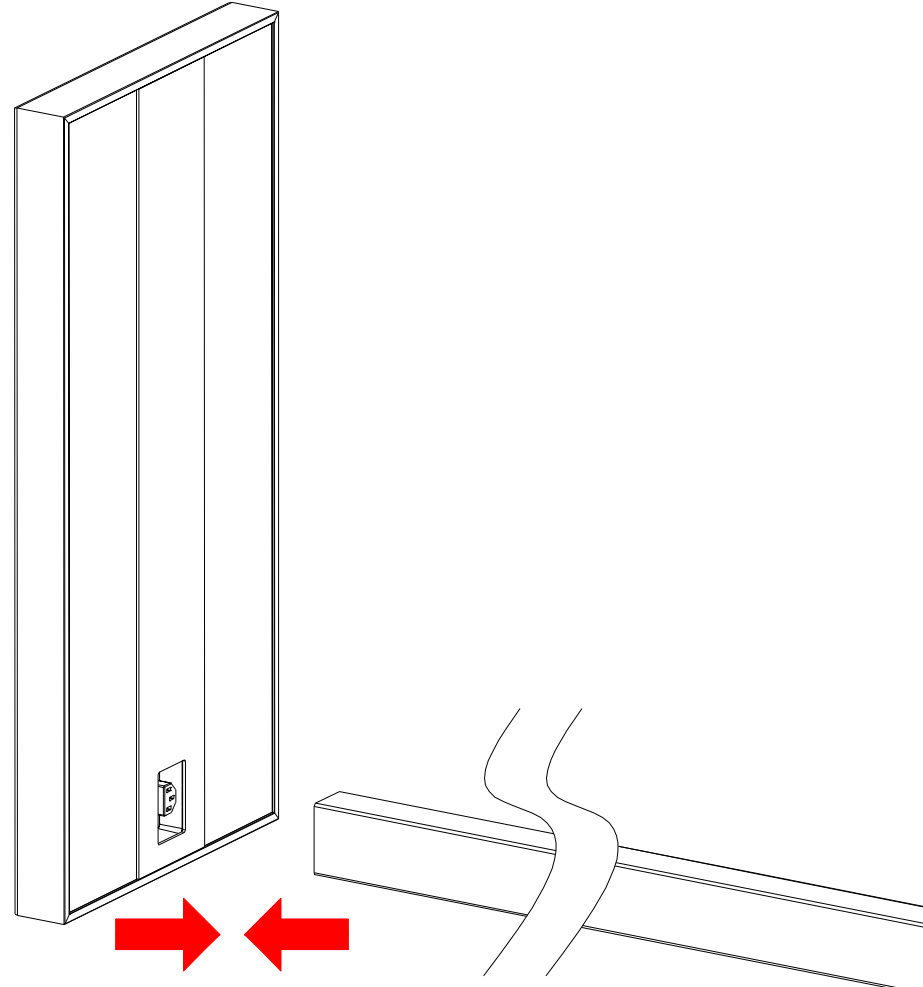


As shown in the picture, connect the lamp head to the lamp pole.

6

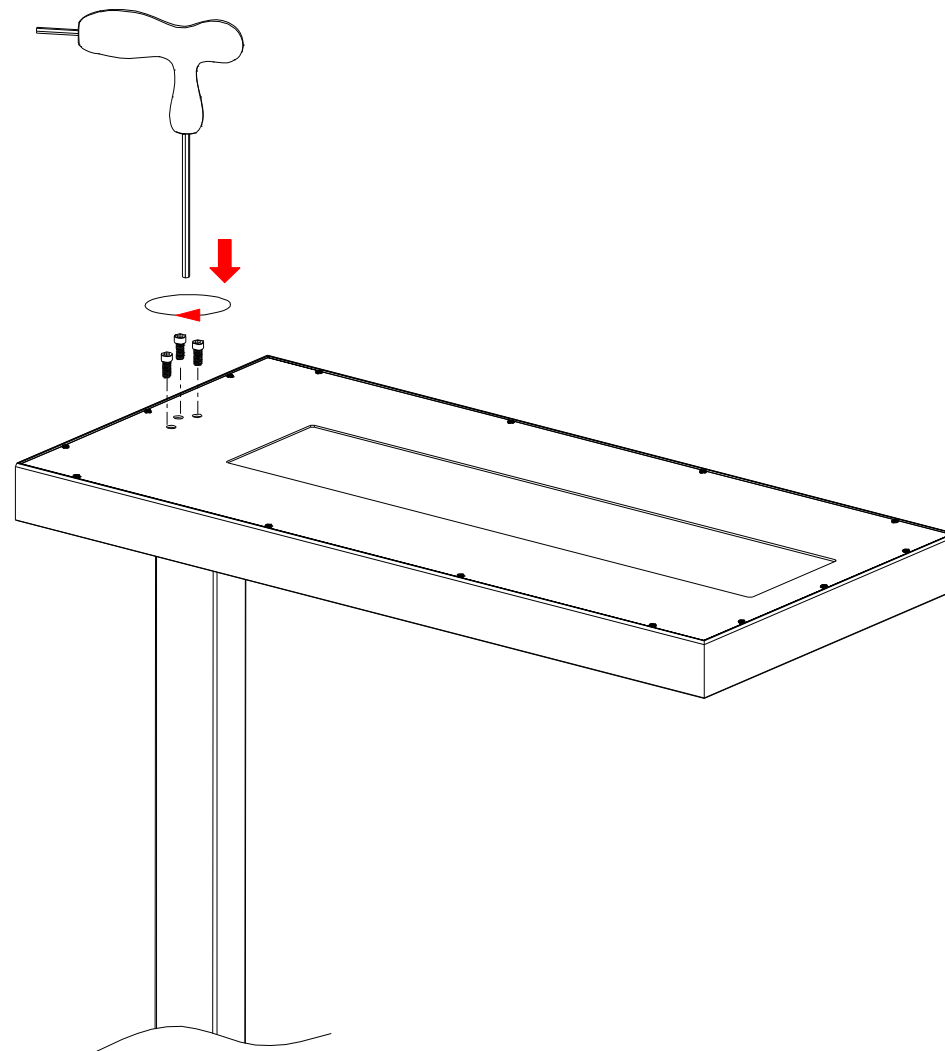


After inserting the lamp pole into the lamp head, use a hex wrench and screw A to tighten the lamp pole and lamp head together.

7

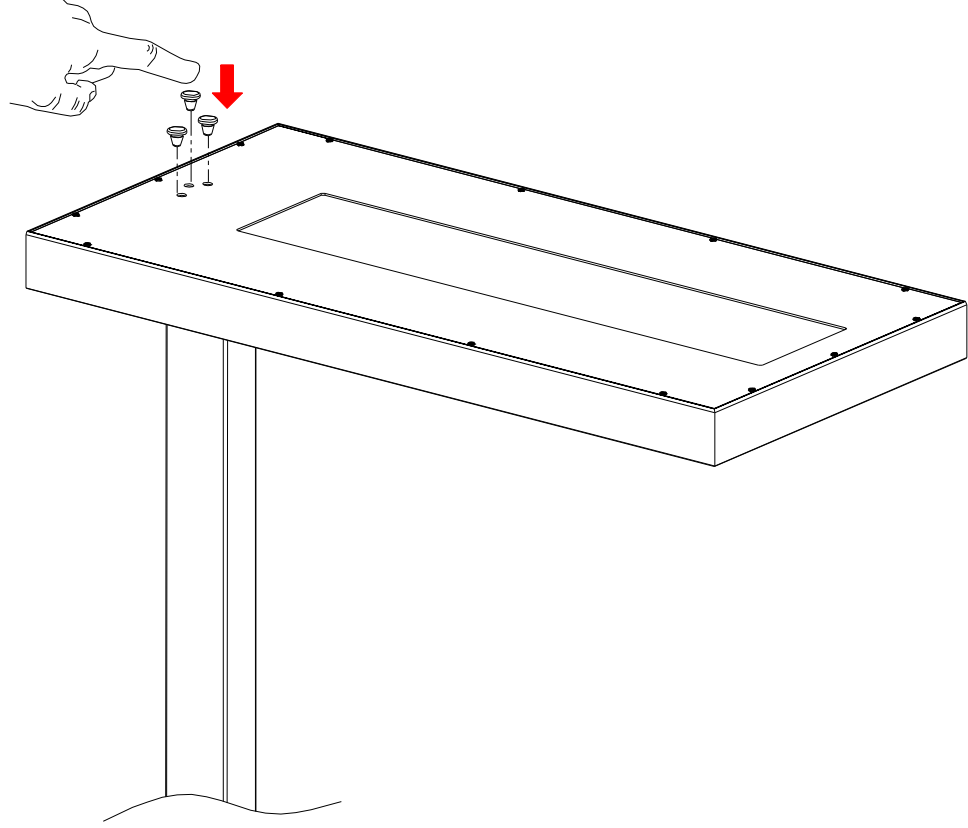

Remove the rubber stopper, align it with the tightened screw hole, and gently press it down to block the dust hole.

8

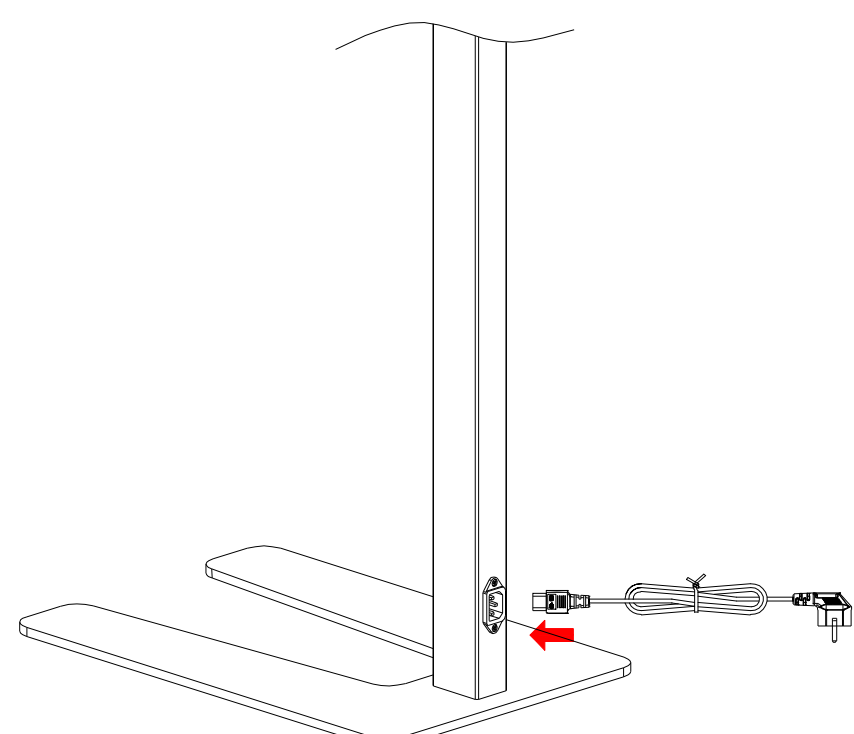

1. Insert the power cord provided in the package into the lamp pole socket, ensuring a secure connection.
2. Plug the cord into the socket to connect the power supply.