


Spectrum Test Report

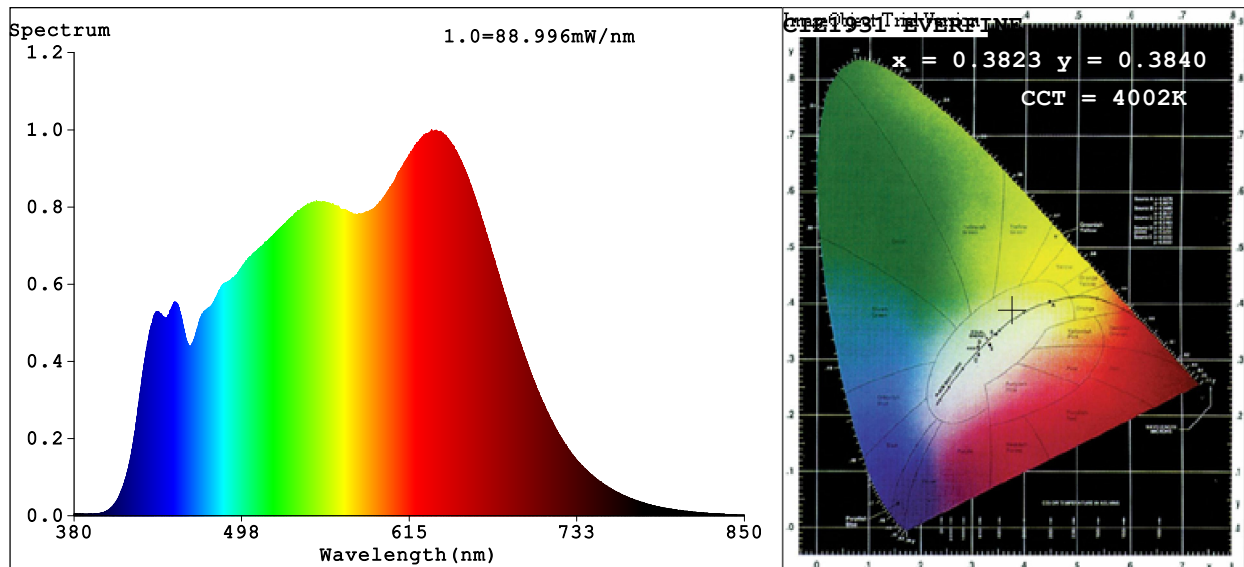

Color Parameters:

Chromaticity Coordinate: $x=0.3823$ $y=0.3840$ / $u'=0.2235$ $v'=0.5050$
CCT=4002K (Duv=0.0028) Dominant WL: $L_d=577.6\text{nm}$ WL: $L_c=--\text{nm}$ Purity=30.0%
Ratio: R=20.5% G=74.7% B=4.8% Peak WL: $L_p=630.6\text{nm}$ FWHM=220.5nm
Render Index: $R_a=98.4$ AvgR=97.9

R1 =99 R2 =99 R3 =96 R4 =98 R5 =99 R6 =99 R7 =98
R8 =98 R9 =97 R10=98 R11=97 R12=95 R13=98 R14=97 R15=99

Photo Parameters:

Flux = 5127 lm Eff. : 92.04 lm/W Fe = 18.80 W

Electrical parameters:

Luminaire: V = 220.50 V I = 0.2560 A Use Luminaire Power P = 55.70 W PF = 0.9660

Lamp: V = 5.000 V I = 0.02000 A P = 0.1000 W PF = 1.000

LEVEL:OUT

Status: Integral T = 119 ms Ip = 48717 (74%)







GBT5702

Model: CL1527-60W
Tester: yu
Temperature: 25.3Deg
Manufacturer: EVERFINE

Number: 1
Date: 2026-04-10 13:42:41
Humidity: 65.0%
Remarks:

TM30

视场角:2 度

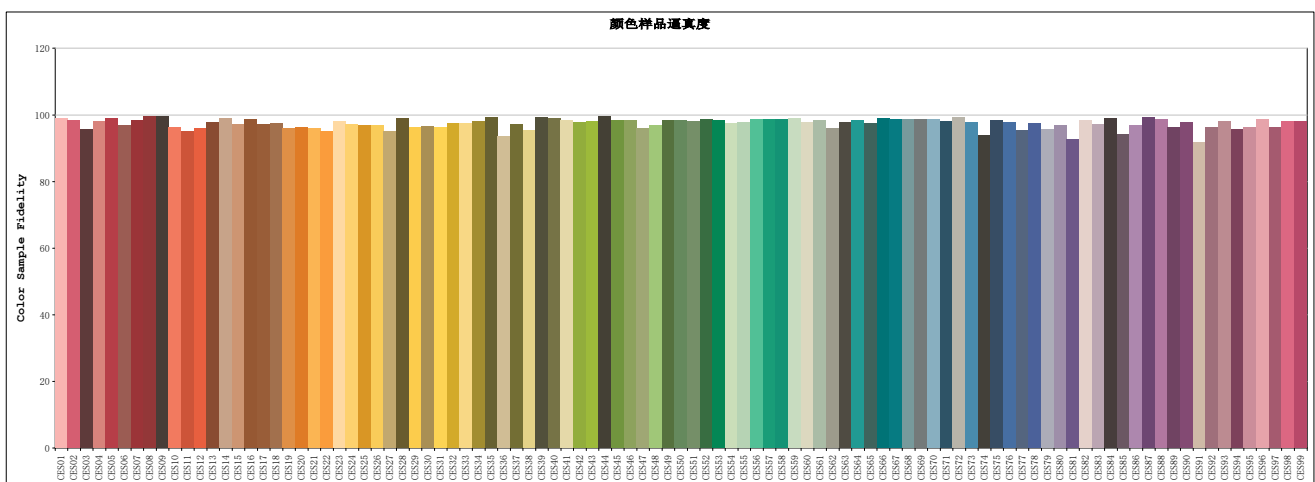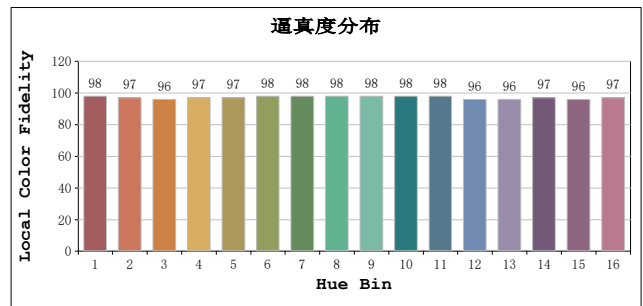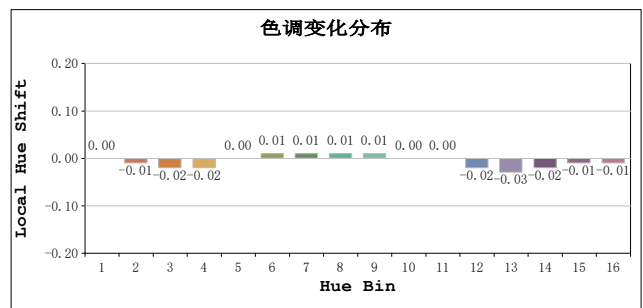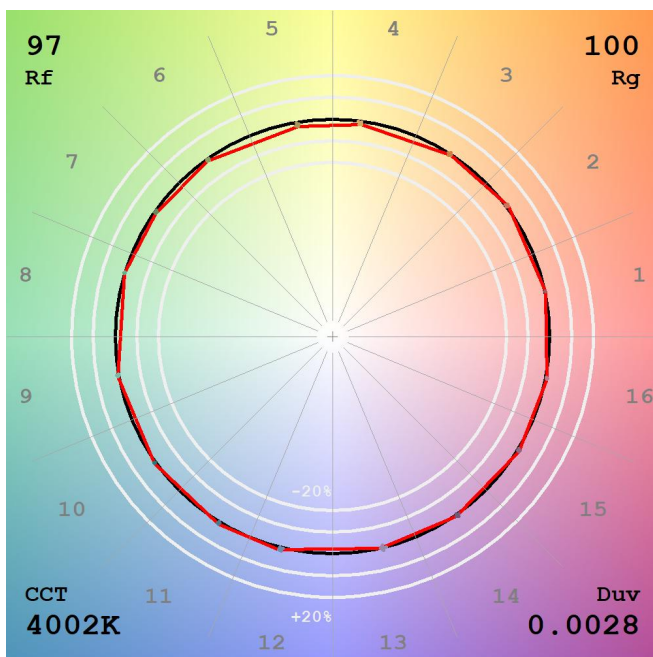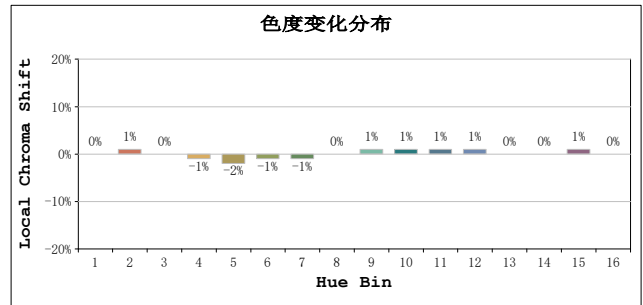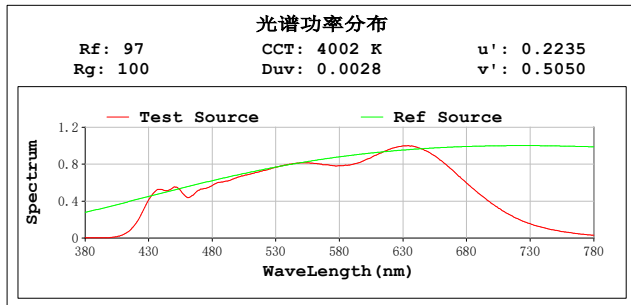

Model:CL1527-60W
Tester:yu
Temperature:25.3Deg
Manufacturer:EVERFINE

Number:1
Date:2026-04-10 13:42:41
Humidity:65.0%
Remarks: