

Vatix-C

BR-FS1008-100W-L10



100W

Input Power

12000lm


Luminous

UGR<10

Visual Comfort


120lm/W

Lighting Effect

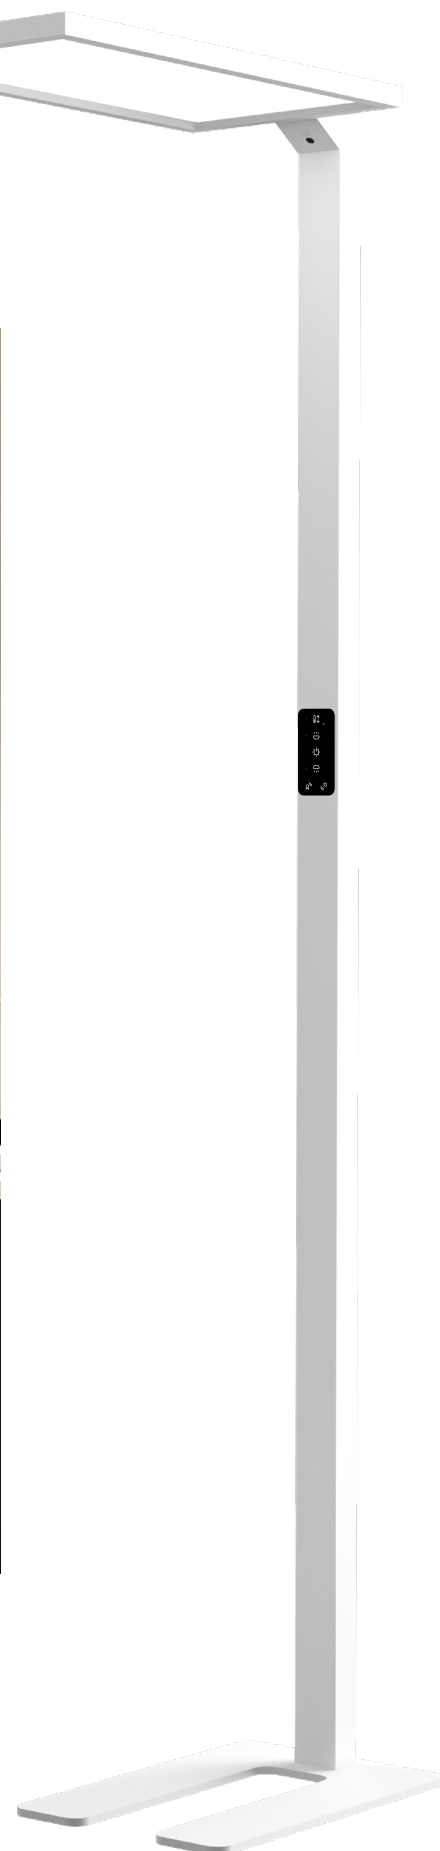


Specification System

Product Anatomy

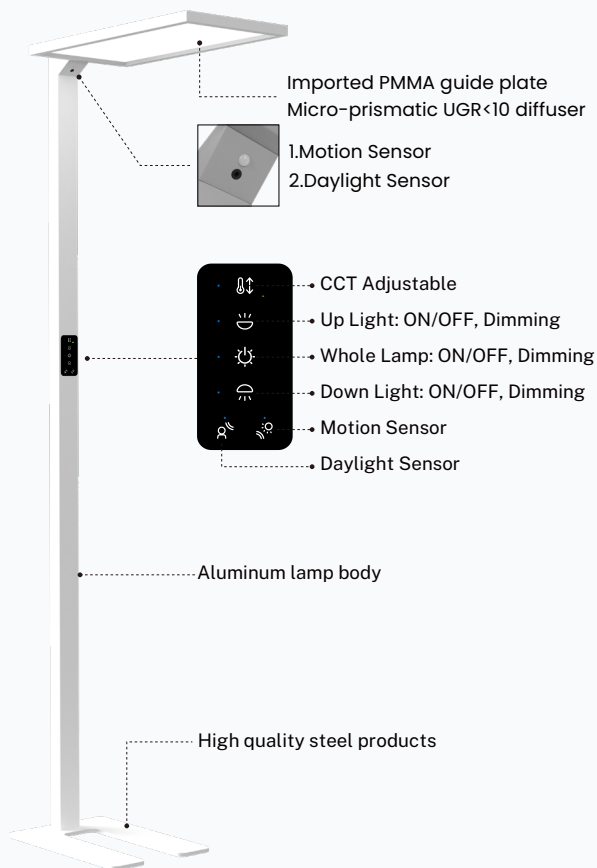


Dimensional Drawing

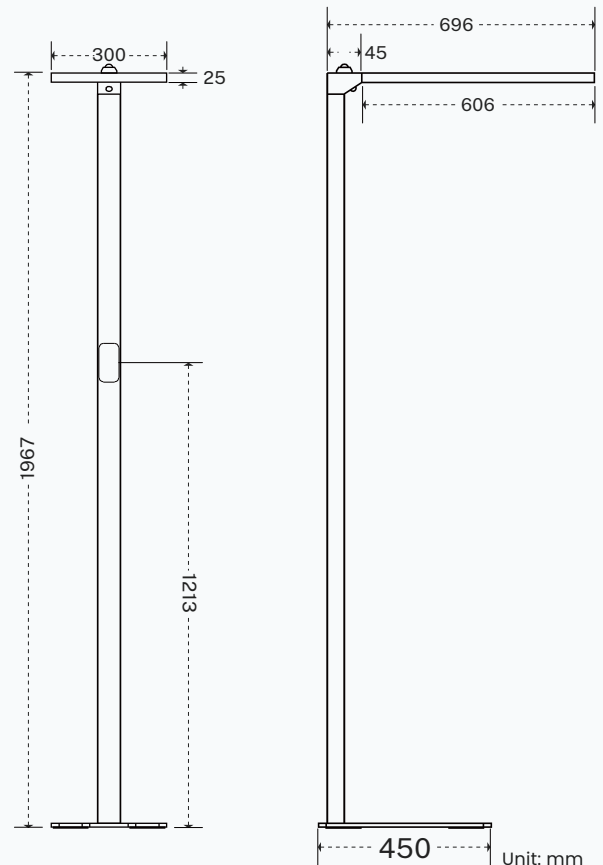


Technical Data

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



CO PLANE ISOLUX DIAGRAM (UNIT:lx)



Product Series	Vatrix-C
Model Number	BR-FS1008-100W-L10
Size	606*450*1967mm
Input Voltage	AC200-240/50Hz
Lighting Effect	120lm/W
Input Power	100W
Luminous Ratio	Indirect ↑ 80%, Direct ↓ 20%
Housing Color	H3-W561 (Ral7038A/black available)
Luminous	12000lm/Indirect ↑ 9600lm, Direct ↓ 2400lm
CRI (Ra)	≥80
UGR	<10
Dimming Type	Touch / Daylight Sensor / Motion Sensor / CCT Dimming
Working Lifetime(Hour)	≥36000 H
Color Temperature	3000-5700K
Protection Level	IP40
Working Temperature	0°C~40°C
Application	Office / Conference Room / Reception
Light Source	SMD2835-LUMILEDS
Beam Angle	Indirect ↑ 110°, Direct ↓ 74°
Warranty	3 Years/5 Years
Packaging Size	1106*510*256mm
Outlet Length	1.8m