


Spectrum Test Report

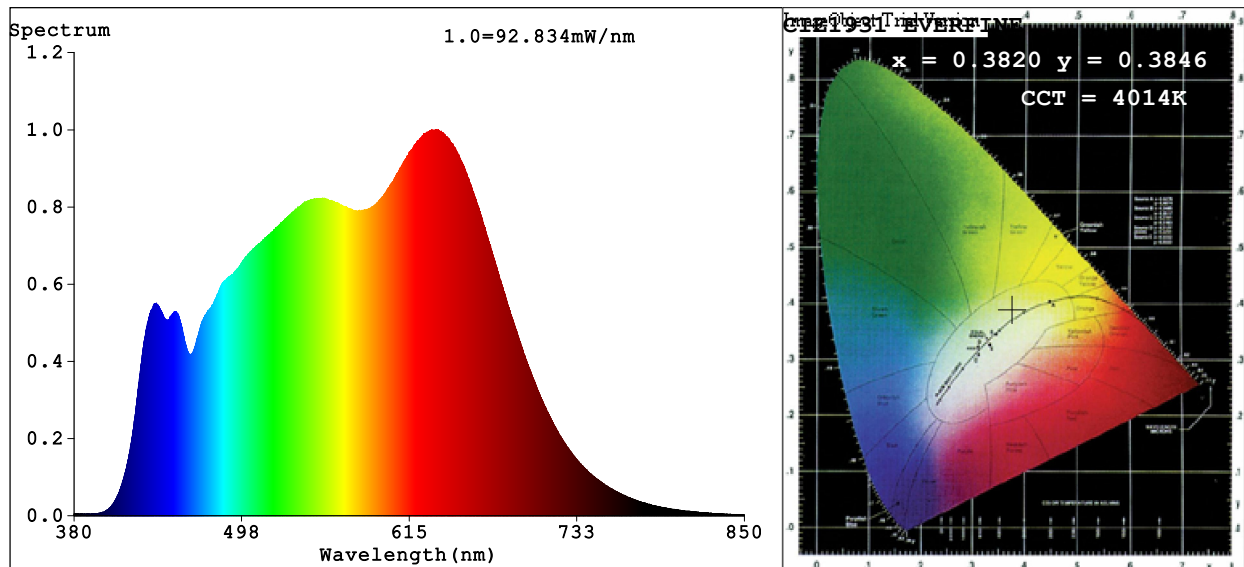

Color Parameters:

Chromaticity Coordinate: $x=0.3820$ $y=0.3846$ $u'=0.2230$ $v'=0.5052$
CCT=4014K (Duv=0.0032) Dominant WL:Ld =577.4nm WL:Lc = --nm Purity=30.1%
Ratio:R=20.4% G=74.8% B=4.8% Peak WL:Lp=633.8nm FWHM=218.7nm
Render Index:Ra=98.3 AvgR=98.0

R1 =99 R2 =99 R3 =96 R4 =98 R5 =99 R6 =99 R7 =98
R8 =98 R9 =98 R10=97 R11=97 R12=96 R13=99 R14=97 R15=99

Photo Parameters:

Flux = 5399 lm Eff. : 93.09 lm/W Fe = 19.79 W

Electrical parameters:

Luminaire: V = 220.50 V I = 0.2750 A Use Luminaire Power P = 58.00 W PF = 0.9670
Lamp: V = 5.000 V I = 0.02000 A P = 0.1000 W PF = 1.000
LEVEL:OUT WHITE:ANSI_4000K
Status: Integral T = 119 ms Ip = 51242 (78%)







GBT5702

Model:CL1227-60W
Tester:yu
Temperature:25.3Deg
Manufacturer:EVERFINE

Number:1
Date:2026-04-10 10:33:24
Humidity:65.0%
Remarks:

TM30

视场角:2 度

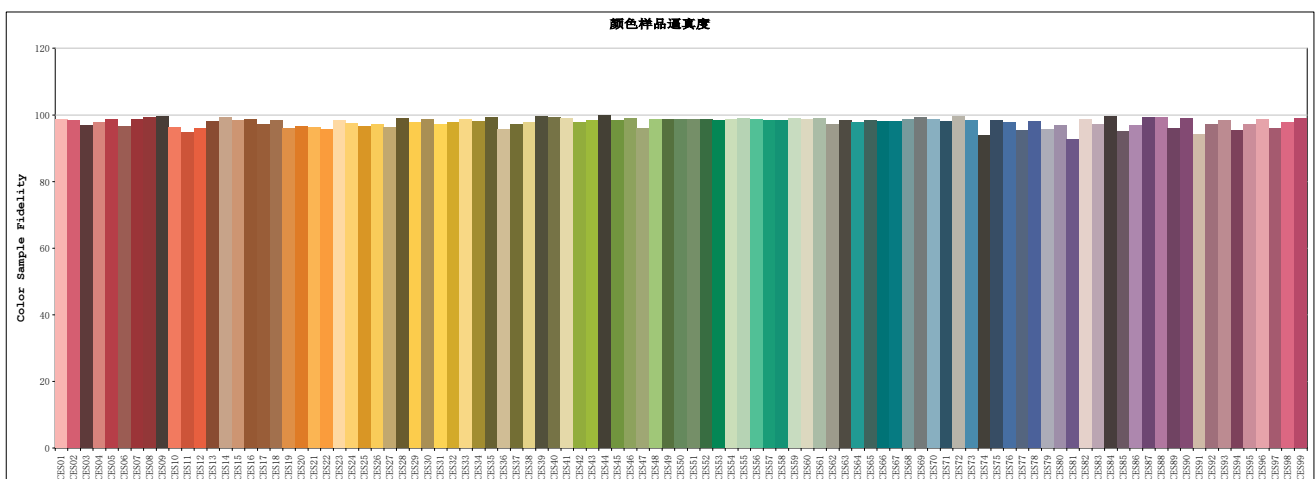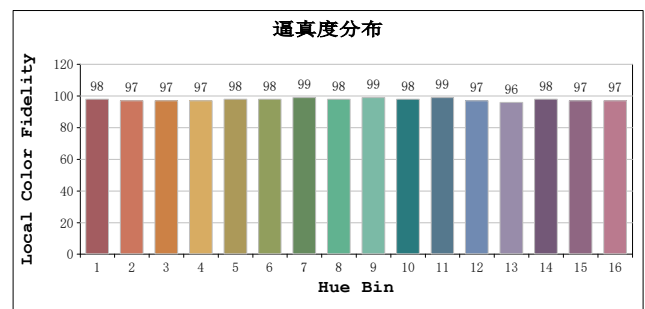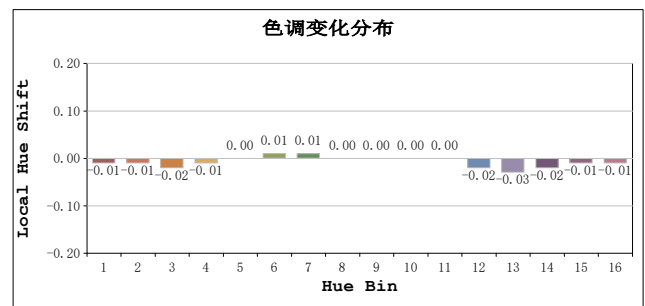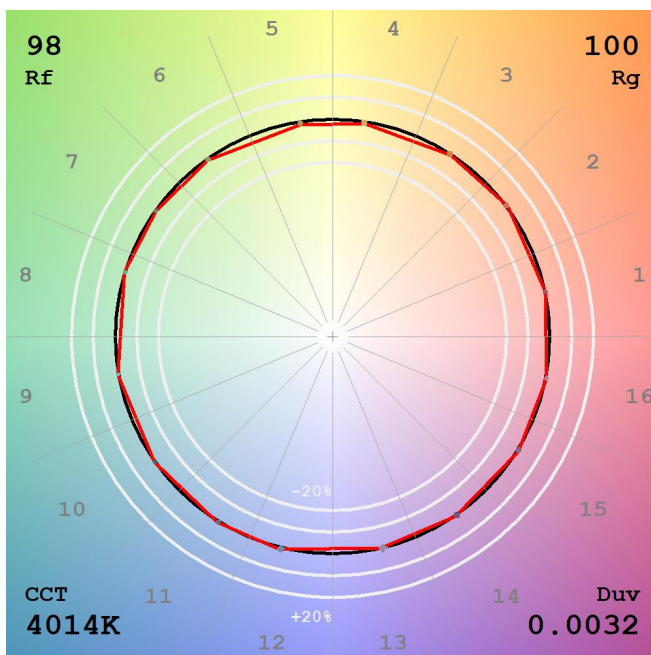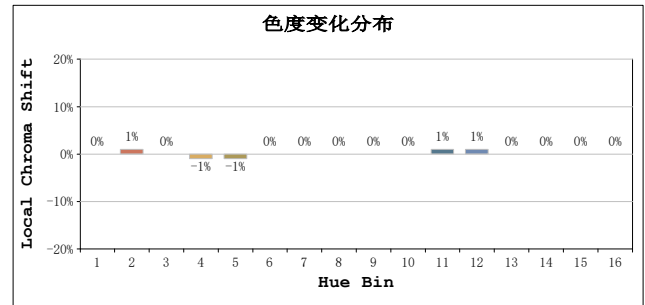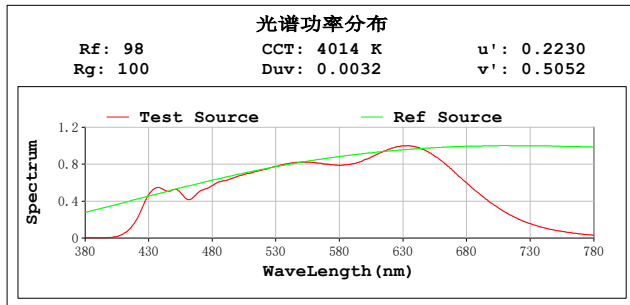

Model:CL1227-60W
Tester:yu
Temperature:25.3Deg
Manufacturer:EVERFINE

Number:1
Date:2026-04-10 10:33:24
Humidity:65.0%
Remarks: