


Spectrum Test Report

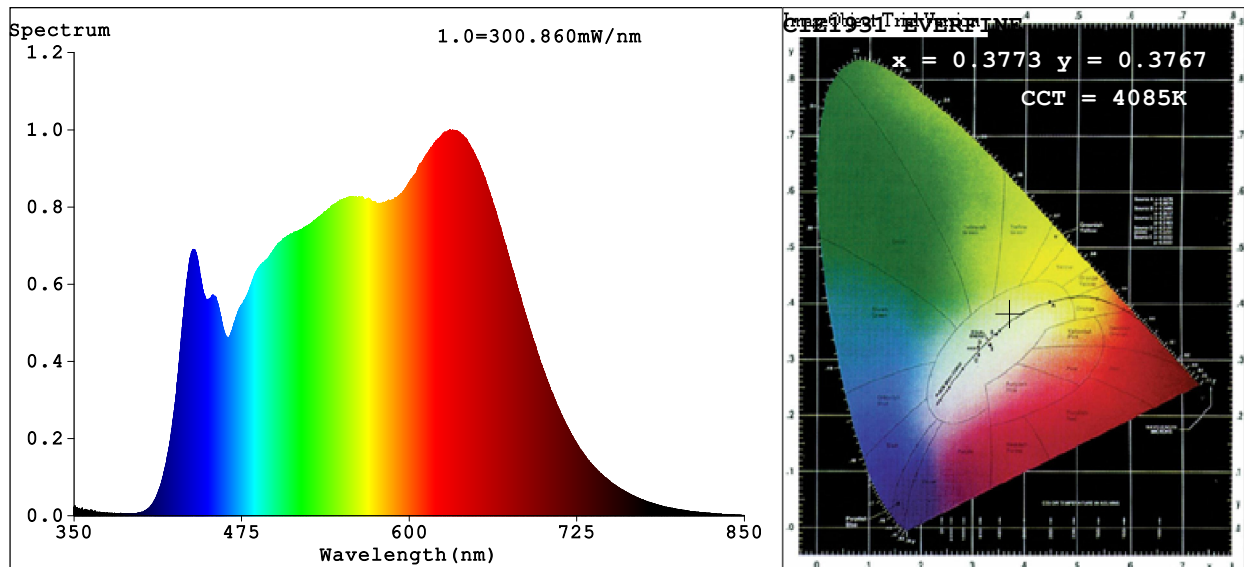

Color Parameters:

Chromaticity Coordinate: $x=0.3773$ $y=0.3767$ $u'=0.2231$ $v'=0.5011$
CCT=4085K (Duv=0.0009) Dominant WL:Ld =578.2nm WL:Lc = --nm Purity=26.3%
Ratio:R=20.3% G=74.7% B=5.0% Peak WL:Lp=630.3nm FWHM=219.0nm
Render Index:Ra=98.6 AvgR=98.4

R1 =99 R2 =100 R3 =97 R4 =98 R5 =99 R6 =99 R7 =99
R8 =98 R9 =98 R10=99 R11=96 R12=97 R13=99 R14=98 R15=99

Photo Parameters:

Flux = 17691 lm Eff. : 97.20 lm/W Fe = 65.47 W

Electrical parameters:

Luminaire: V = 219.00 V I = 0.8370 A Use Luminaire Power P = 182.0 W PF = 0.9940
Lamp: V = 5.000 V I = 0.02000 A P = 0.1000 W PF = 1.000
LEVEL:OUT WHITE:ANSI_4000K
Status: Integral T = 40 ms Ip = 46164 (70%)







GBT5702

Model:FS0049
Tester:DAMIN
Temperature:25.3Deg
Manufacturer:EVERFINE

Number:1
Date:2026-03-18 20:16:15
Humidity:65.0%
Remarks:整灯全功率

TM30

视场角:2 度

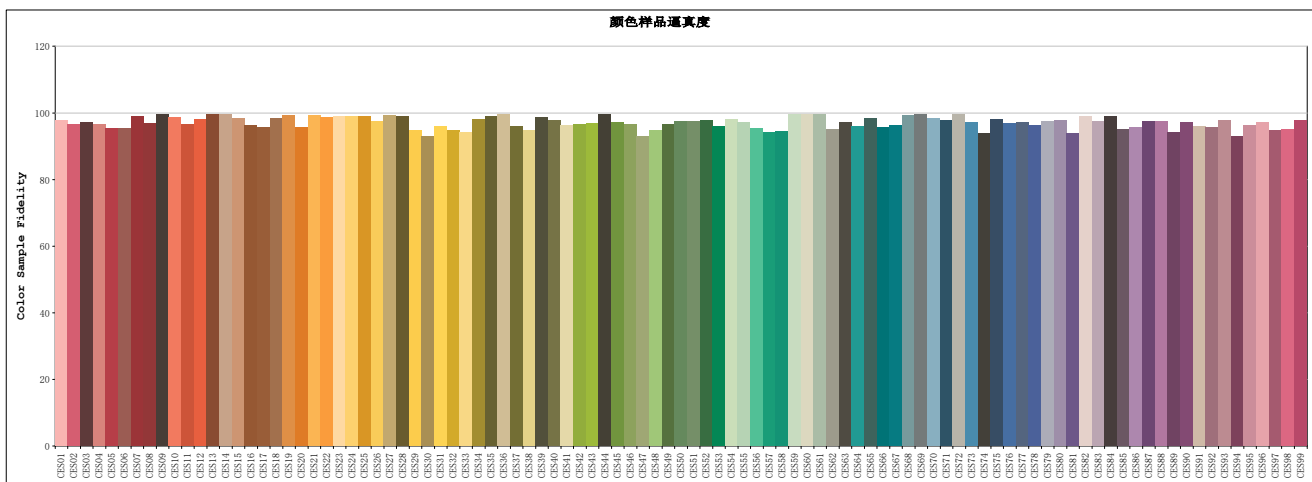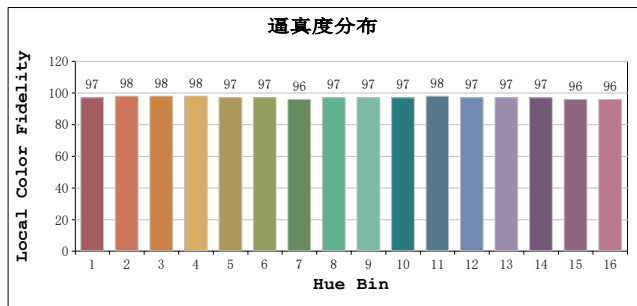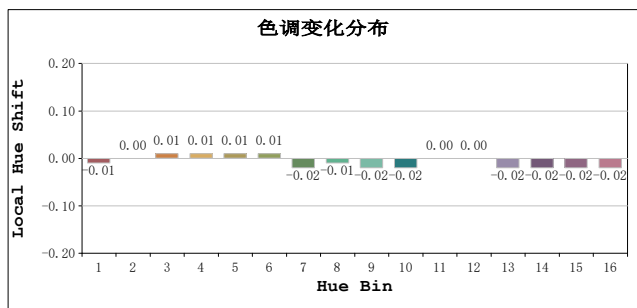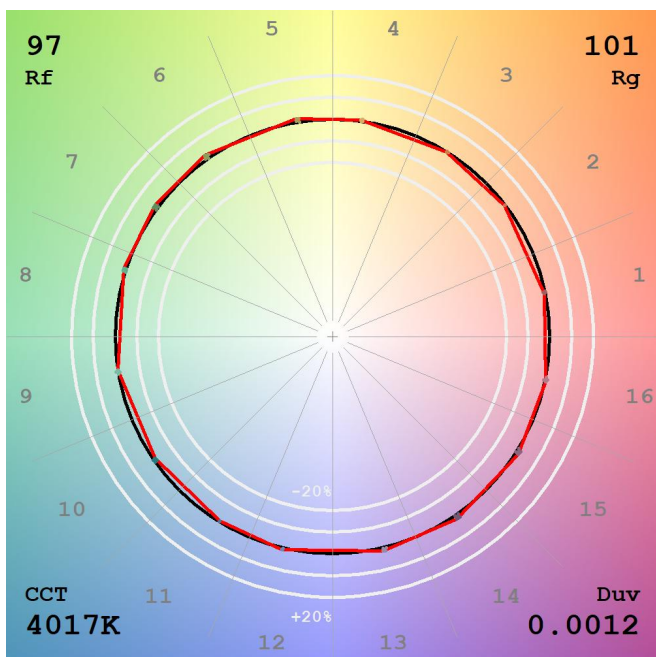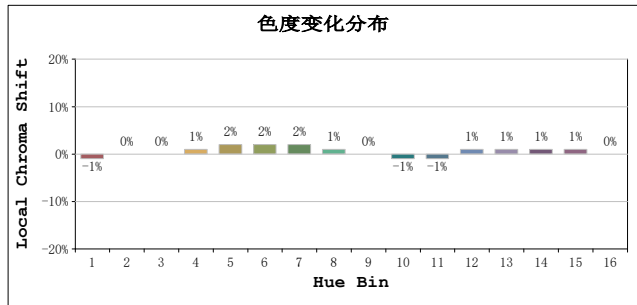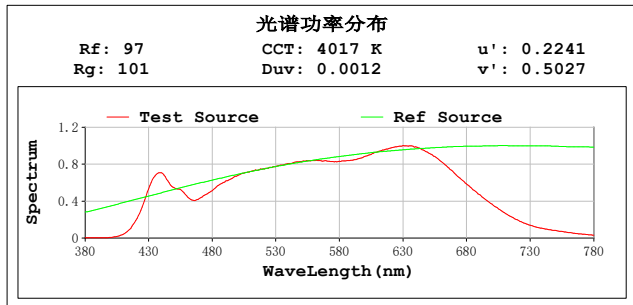

Model:FS0049
Tester:DAMIN
Temperature:25.3Deg
Manufacturer:EVERFINE

Number:1
Date:2026-03-18 20:16:15
Humidity:65.0%
Remarks:整灯全功率